


### Selecting which Output is Operated by a Reader

The 'Play Events' control allows the installer to select which output is operated when a valid tag is presented to a reader. For each reader (either in or out) either one or both of the output relays can be operated when a valid tag is presented. Likewise, either or both output relays can be operated when the 'Exit Switch' input is triggered. Indeed, any event can be selected to operate an output. For example, the excessive keying attempt can be used to operate an output in order to turn on a light or sounder.

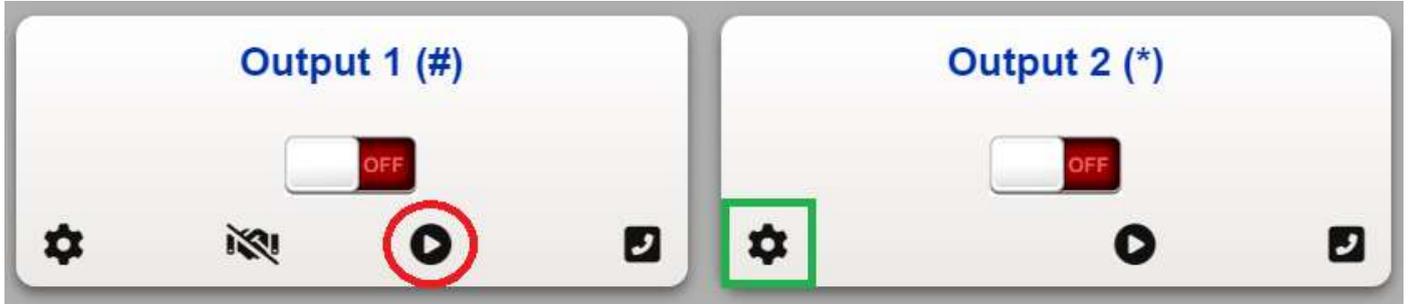

On the Live Screen will be displayed the controller output cards for Output 1 and Output 2. Clicking the 'Play' button (red circle above) will bring up the play controls modal. 3 events can be selected to operate the output and 3 events can be selected to switch off the output. 2 timed events can also be selected to operate the output for the period of time set by the settings control on the output card (click the gear wheel – green square).

#### Event Driven Output Activation



Select up to 3 events to switch **ON** the output

	▼
	▼
	▼

Select up to 3 events to switch **OFF** the output

	▼
	▼
	▼

Select up to 2 events to switch on the output for a **limited time**

Access Granted	▼
Exit Switch Pressed	▼

Save

Select Events from the appropriate Dropdown Boxes